


DP-16K/ 16KM/ 16KL *Differential Probe*

SPECIFICATIONS:

| FUNCTION / MODEL | DP-16K | DP-16KM | DP-16KL |
|------------------------------------|--|--------------|--------------|
| Differential Voltage DC + AC peak | X1000 ± 8 KV X100 ± 800V | | |
| Bandwidth (-3dB) | DC to 100 MHz | DC to 70 MHz | DC to 50 MHz |
| Rise Time | 3.5 ns | 5 ns | 7 ns |
| Common Mode Voltage DC + AC peak | ± 4 KV DC or 8 KV p-p | | |
| Common Mode Voltage AC / RMS | 5650 Vrms | | |
| Range (Switchable) | 2 (X100, X1000) | | |
| Input Impedance (Between Input) | 20 MΩ // 5 pF | | |
| Each Input R//C | 10 MΩ // 10 pF | | |
| Common Mode Rejection Ratio (CMRR) | 60 Hz: > 10000 : 1 100 Hz: > 1000 : 1 1 MHz: > 300 : 1 | | |
| DC Gain Accuracy | ± 2% | | |
| Output Range | ± 8 V (1 MΩ Load) | | |
| Output Impedance | 50 Ω | | |
| Over Range Indicate | X1000: ± 8 KV X100: ± 800 V | | |
| Power Range | 5 V ~ 9 VDC (5 V / 2ADC) | | |
| Dimensions / Weight | 220 x 85 x 30 mm / 450 g | | |



ACCESSORIES:

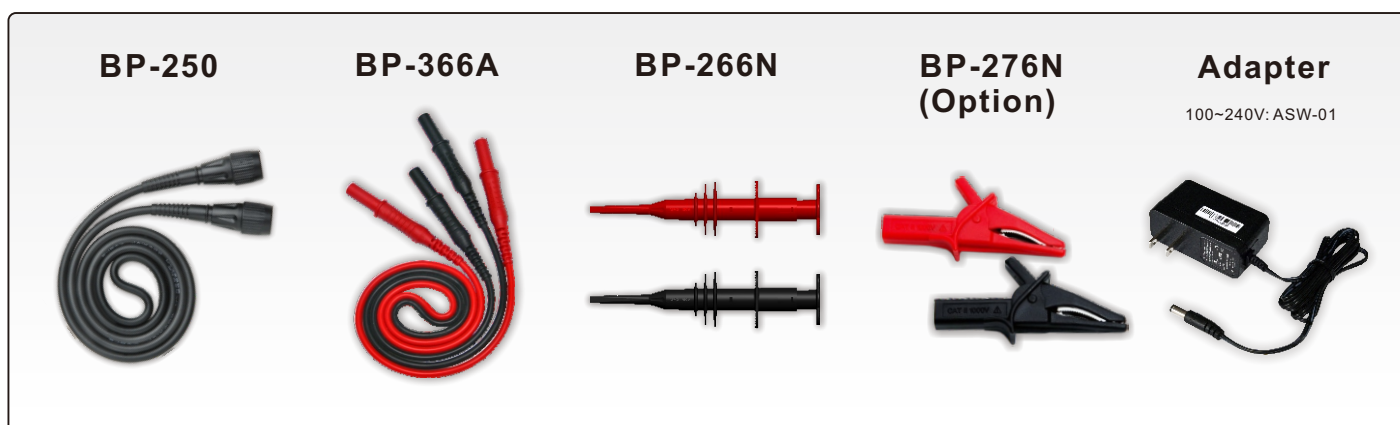

PINTEK

Pintek Electronics Co., Ltd

2F No.32 Tai-Pen Rd., Shulin Dist., New Taipei City, Taiwan

Tel: 886-2-86859562~3 ; 886-2-86861898

Fax: 886-2-86852081 ; 886-2-86861114

<http://www.pintek.com.tw>

E-Mail : pintek@pintek.com.tw ; pintek@ms26.hinet.net

SALES AGENT