


DP-16K/ 16KM/ 16KL *Differential Probe*

SPECIFICATIONS:

FUNCTION / MODEL	DP-16K	DP-16KM	DP-16KL
Differential Voltage DC + AC peak		x1000 ± 8 KV x100 ± 800V	
Bandwidth (-3dB)	DC to 100 MHz	DC to 70 MHz	DC to 50 MHz
Common Mode Voltage DC + AC peak		± 8 KV	
Common Mode Voltage AC / RMS		5650 VRMS	
Range (Switchable)		2(x100, x1000)	
Input Impedance (Between Input)		20 MΩ // 5 pF	
Each Input R//C		10 MΩ // 10 pF	
Common Mode Rejection Ratio (CMRR)		60 Hz: > 10000 : 1 100 Hz: > 1000 : 1 1 MHz: > 300 : 1	
DC Gain Accuracy		± 2%	
Output Range		± 8 V (1 MΩ Load)	
Output Impedance		50 Ω	
Over Range Indicate		x1000: ± 8 KV x100: ± 800 V	
Power Range		5 V ~ 12 VDC	
Dimensions / Weight		220 x 85 x 30 mm / 450 g	



ACCESSORIES:

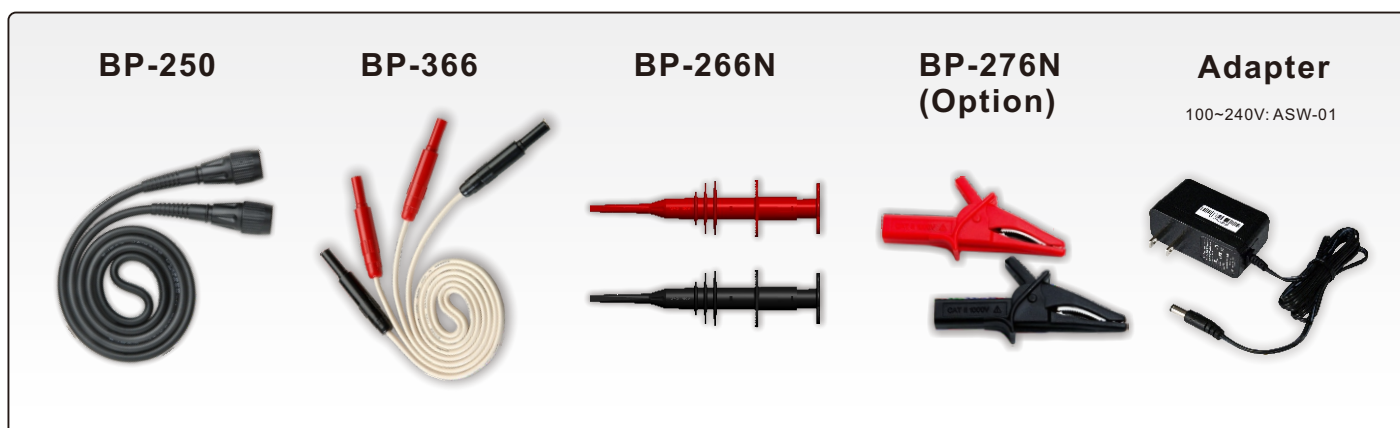

PINTEK

Pintek Electronics Co., Ltd

2F No.32 Tai-Pen Rd., Shulin Dist., New Taipei City, Taiwan

Tel: 886-2-86859562~3 ; 886-2-86861898

Fax: 886-2-86852081 ; 886-2-86861114

<http://www.pintek.com.tw>

E-Mail : pintek@pintek.com.tw ; pintek@ms26.hinet.net

SALES AGENT