


PW-4033 200 VA DC Power Supply

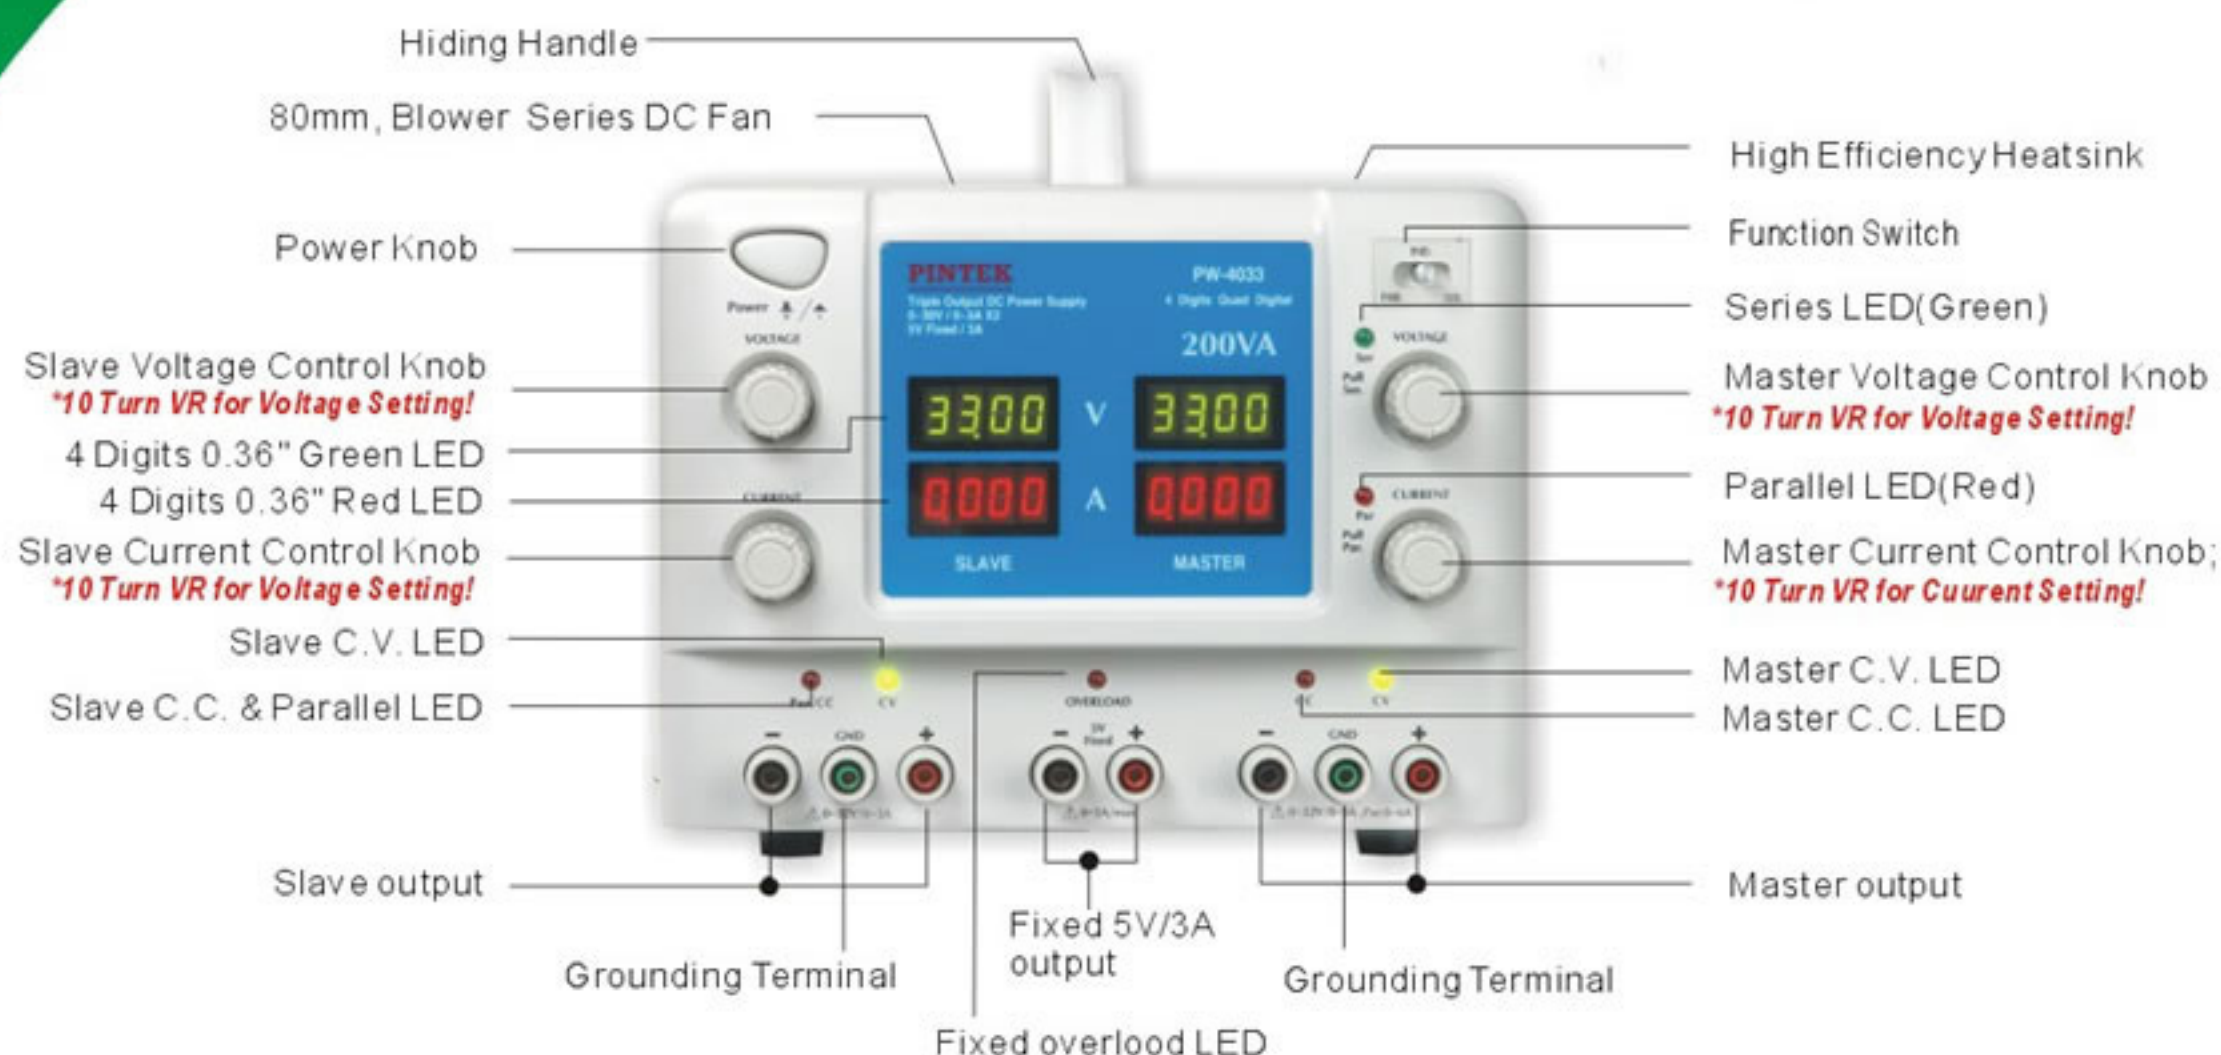

SPECIFICATIONS

Power Transformer:	E.I. Type Transformer
Max. Continual Output Power:	195VA
Max. Raised Temperature:	< 45 °C
Independent Output:	0~30V/0~3Ax2, 5V Fixed / 0~3A; Triple Output

Constant Voltage Characteristic

Regulation:	Line < 0.05% + 3mV, Load < 0.05% + 5mV
Ripple & Noise:	< 0.4mVrms
Temperature Coefficient:	< 300PPM/°C

Constant Current Characteristic

Regulation:	Line < 0.2% + 2mA, Load < 0.2% + 3mA
Ripple & Noise:	< 2.5mArms

5V Fixed Output

Regulation:	Line Regulation < 5mV, Load Regulation < 10mV
Ripple & Noise:	< 1.5mVrms
Voltage Accuracy:	5V ± 0.25V
Max. Output Current:	3A

Tracking Operation

Parallel Regulation:	Line < 0.01% + 3mV, Load < 0.01% + 5mV
Series+and-Supplay Regulation:	Line < 0.01% + 3mV, Load < 0.01% + 5mV Slave tracking error < 0.5% + 2 digital of the master
Series Single Supply Regulation:	Line < 0.01% + 5mA, Load Regulation < 300mV

Display

Voltage / Current:	4 Digits 0.36" Green LED / 4 Digits 0.36" Red LED
Accuracy:	0.05% + 3 digits

General

Power Source:	ACV 115/230 ± 10%, 50/60Hz
Dimensions(W x H x D) / Weight:	230 x 170 x 310 mm / 8.0 kg

PINTEK

Pintek Electronic Co., Ltd

2F No.32 Tai-Pen Rd., Shulin City, Taipei Hsien, Taiwan

Tel: 886-2-86859562~3 Fax: 886-2-86852081

<http://www.pintek.com.tw>

E-Mail : pintek@pintek.com.tw ; pintek@ms26.hinet.net

SALES AGENT